

10-02-00

A

JCS675 U.S. PTO  
09/29/00Patent  
Attorney's Docket No. 040070-619

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT  
APPLICATION TRANSMITTAL LETTERJCS675 U.S. PTO  
09/29/00  
09/29/00Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Torgny PALENIUS for Method and Apparatus for Transmit Power Control.

Also enclosed are:

- [X] 7 sheet(s) of [X] formal [ ] informal drawing(s);
- [X] a claim for priority under 35 U.S.C. §§ 119 and/or 365 [X] is hereby made to U.S. Provisional Application Serial No. 60/156,699 filed in United States on September 30, 1999;
- [ ] in the declaration;
- [ ] Other:
- [X] An [ ] executed [X] unexecuted declaration of the inventor(s)  
[X] also is enclosed [ ] will follow.
- [ ] A bibliographic data entry sheet is enclosed.
- [X] Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§ 119 and/or 365 to U.S. Provisional Application Serial No. 60/156,699 filed in United States on September 30, 1999; the entire content of which is hereby incorporated by reference.--

\*Express Mail\* mailing label No. EL581398694USDate of Deposit 9-29-00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Sandra Paye  
(Type or printed name of person mailing paper or fee)Sandra Paye  
(Signature of person mailing paper or fee)

21839

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee (101)					\$ 690.00
Total Claims	16	MINUS 20 =	0	x \$18 = (103)	0.00
Independent Claims	2	MINUS 3 =	0	x \$78 = (102)	0.00
If multiple dependent claims are presented, add \$260.00 (104)					0
Total Application Fee					690.00
If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					0
Add Assignment Recording Fee of \$40.00 (581) if Assignment document is enclosed					0
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$690.00</b>

- [ ] This application is being filed without a filing fee. Issuance of a Notice to File Missing Parts of Application is respectfully requested.
- [X] Charge \$ 690.00 to Deposit Account No. 02-4800 for the fee due.
- [X] The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.


Please address all correspondence concerning the present application to:

Ronald L. Grudziecki  
BURNS, DOANE, SWECKER & MATHIS, L.L.P.  
P.O. Box 1404  
Alexandria, Virginia 22313-1404.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(919) 941-9240

By:   
Stephen J. Tyran  
Registration No. 45,846

Date: September 29, 2000

## METHOD AND APPARATUS FOR TRANSMIT POWER CONTROL

### RELATED APPLICATIONS

5 This application is related to, and claims priority from, U.S. Provisional Application Serial No. 60/156,699 entitled "Setting of Power Offset in the Uplink of a Radio Communication System" filed on September 30, 1999, the disclosure of which is expressly incorporated herein by reference.

### BACKGROUND

10 This invention relates to the control of power levels of transmitted signals in telecommunication systems, in particular radiocommunication systems.

Good transmit power control methods are important for communication systems having many transmitters that transmit simultaneously to minimize the mutual interference of such transmitters while assuring high system capacity. As an  
15 example, such power control is important for communication systems that use Wideband Code Division Multiple Access (W-CDMA). Depending upon the system characteristics, power control in such systems can be important for transmission in the uplink (i.e., for transmissions from a remote terminal to the network), the downlink (i.e., for transmissions from the network to the remote  
20 terminal), or both.

To achieve reliable reception of a signal at each remote station, the signal to interference ratio (SIR) of the received signal should exceed a prescribed threshold for each remote station (referred to as a "required signal-to-interference" level or  $SIR_{req}$ ). For example, as shown in FIG. 1, consider the case in which three remote  
25 stations receive, respectively, three signals on a common W-CDMA communication channel. Each of the signals has a corresponding energy level associated with it, namely energy levels E1, E2 and E3, respectively. Also present on the communication channel is a certain level of noise (N). For the first remote station to properly receive its intended signal, the ratio between E1 and the aggregate levels  
30 of E2, E3 and N must be above the first remote station's required signal-to-

interference ratio  $SIR_{req}$ .

To improve the SIR of a received signal, the energy of the transmitted signal may be increased, depending on the SIR measured at the receiver. A technique for controlling transmit power in radiocommunication systems in this manner is commonly referred to as a fast power control loop. According to this technique, an initial SIR target is established based upon a desired quality of service (QoS) for a particular connection or service type. For non-orthogonal channels, the actual SIR values measured by a particular remote station or base station can be expressed as:

$$SIR = \frac{\text{Mean power of received signal}}{\text{Sum of the mean power of all interfering signals}} \quad (1)$$

The SIR is measured by the receiver and is used for determining what power control commands to send to the transmitter. For example, if the measured SIR at a remote station is less than the target SIR, a power control command is sent to the base station, directing the base station to increase the transmit power. Conversely, if the measured SIR is greater than the target SIR, the transmitted power control command instructs the base station to decrease the transmit power.

A slow power control loop can then be used to adjust the SIR target value on an ongoing basis. For example, a remote station receiver can measure the quality of the signal received from the base station using, e.g., known bit error rate (BER) or frame error rate (FER) techniques. Based upon the received signal quality, which may fluctuate during the course of a connection between the transmitter and the receiver, the slow power control loop can adjust the SIR target that is used by the fast power control loop in the remote station to control the uplink transmit power. Similar techniques can be used to control the downlink transmit power.

A drawback to this technique for power control is that increasing the energy associated with signals transmitted to one remote station increases the interference associated with signals transmitted to other nearby remote stations. Thus, radio communication systems must strike a balance between the requirements of all remote stations sharing the same common channel. A steady state condition is

reached when the SIR requirements for all remote stations within a given radio communication channel are satisfied. Generally speaking, the balanced steady state may be achieved by transmitting to each remote station using power levels which are neither too high nor too low. Transmitting messages at unnecessarily high levels increases interference experienced at each remote station and limits the number of signals which may be successfully communicated on the common channel, i.e., reduces system capacity.

System capacity is becoming more and more important as consumer demand for radiocommunication services increases. The addition of services such as facsimile, e-mail, video, Internet access, etc. and the desire of users to access different types of services at the same time, e.g., videoconferencing, will require efficient use of system resources.

One technique for handling different types of data communication involves providing a different radio bearer, also referred to as a transport channel or transport format combination (TFC), for each service. A radio bearer provides the capability for information transfer over the radio interface and is characterized by an information transfer rate (i.e., bit rate or throughput) and delay requirements, among other attributes. A radio bearer carries either user data or control signals. Typically, a radio bearer is used for a specific service, e.g., speech. A radio bearer may span several physical channels, or multiple radio bearers may share a physical channel, depending on the bandwidth requirements of each radio bearer.

In addition to one or more radio bearers, a user is typically allocated one or more Physical Data Channels (PDCHs) or Dedicated Physical Data Channels (DPDCHs) which carry user bits. A user or terminal is also typically allocated a Physical Control Channel (PCCH) or a Dedicated Physical Control Channel (DPCCH) on which overhead control information is carried to the user, e.g., bit rate information of the associated PDCHs, transmit power control bits and pilot symbols, at a constant bit rate, which can be used to make the SIR measurements used in the fast power control loop process.

The DPCCH is transmitted at a power level needed to ensure proper power

control, i.e., to ensure an adequate quality of the received power control bits. In general, there is a minimum quality of service (QoS) which must be met by the DPCCH, to ensure proper power control. To meet the desired QoS, the power level at which the DPCCH is transmitted must reach at least a minimum level. For example, the DPCCH in W-CDMA is typically transmitted with a constant spreading factor and at a power level needed to ensure proper performance of TFCI decoding and feedback of information in the FBI bits.

A minimum QoS must also be met by the DPDCH. However, the power level of the DPDCH also depends on the data rate.

The DPDCHs and DPCCHs are typically transmitted at different power levels, based on their different requirements. Therefore, there is a power offset between the DPDCHs and the DPCCHs.

Power offsets between the uplink DPDCH and DPCCH channels in an exemplary wideband CDMA system are specified in 3<sup>rd</sup> Generation Partnership Project, Technical Specification Group Radio Access Network, Spreading and Modulation (FDD), 3G TS 25.213, V3.1.0, the disclosure of which is incorporated here by reference. Examples of power control techniques involving such offsets can be found in U.S. Patent Application No. 08/874,907, entitled "Multiple Code Channel Power Control in a Radio Communication System", filed on June 16, 1997, which is incorporated here by reference.

The manner in which these offset values are determined and updated, e.g., as data rates associated with TFCs vary, is not yet defined. In considering how to manage such offsets, it is important to recognize that if the ratio between the transmit power of the DPCCH and the transmit power of the DPDCH is incorrect, then the power control loop which is working on the DPCCH will have the wrong SIR target. This leads either to a degraded performance on the DPDCH, because the  $E_b/I_0$  ratio (received signal to interference ratio) of the DPDCH is decreased compared with previous slots, or to a good quality on the DPDCH but at an unnecessarily high power level which increases the interference on other channels.

Accordingly, there is a need for a technique for managing power offsets between channels, in particular data channels and control channels, in radiocommunication systems.

5

## SUMMARY

It is therefore an object of the present invention to provide a technique for controlling power offsets between data channels and control channels to avoid signal degradation and signal interference.

According to an exemplary embodiment, this and other objects are met by a method and apparatus for controlling transmit power. A data rate of at least a first channel is determined, and the transmit power of the at least first channel is controlled based on the determined data rate. The transmit power may be adjusted based on a ratio of power between the at least first channel and a second channel, and the ratio may be adjusted based on the data rate of the first data channel. The first channel may be a data channel, and the second data channel may be a control channel. The ratio is adjusted such that a power offset between the first channel and the second channel is proportional to the data rate of the first channel. The ratio may be adjusted based on the coding rate, data transmission rate, and/or a rate matching parameter. The transmit power may also be adjusted based on received power control commands. The transmit power may be adjusted in this manner in the uplink or the downlink direction.

## BRIEF DESCRIPTION OF THE DRAWINGS

The features and objects of Applicant's invention will be understood by reading this description in conjunction with the drawings, in which:

FIG. 1 is a graph of power versus frequency for an exemplary spread spectrum system;

FIG. 2 illustrates a base station and mobile station communicating in a radiocommunication system;

FIG. 3 illustrates an exemplary transceiver in which the present invention may be implemented;

FIG. 4 depicts a transmit processing chain according to an exemplary embodiment;

5 FIG. 5 illustrates an exemplary procedure for determining offset parameters;

FIG. 6 illustrates an exemplary implementation for adjusting transmit power in accordance with the present invention; and

FIG. 7 illustrates a method for adjusting transmit power according to an exemplary embodiment.

10

### DETAILED DESCRIPTION

While this description is in the context of cellular communications systems involving portable or mobile radio telephones, it will be understood by those skilled in the art that Applicant's invention may be applied to other communications  
15 applications. Moreover, while the invention may be used in W-CDMA communication systems, it also may be used in other types of communication systems.

FIG. 2 illustrates an exemplary cell 50 in which a base station (BS) 100 communicates with a mobile station (MS) 110. Although one MS 110 is shown,  
20 those skilled in the art will appreciate that the base station 100 may support connections with many mobile stations concurrently. For purposes of this description, interaction between a single MS and the network is sufficient to illustrate power control techniques according to the present invention. For the purposes of this exemplary embodiment, consider that the system depicted in FIG. 2  
25 operates using a CDMA technology with duplexed downlink and uplink channels. In this example, MS 110 is allocated three uplink/downlink physical channels DPCCCH, DPDCH1, and DPDCH2, as indicated by the three bidirectional arrows. Of course, those skilled in the art will appreciate that the physical channels are unidirectional in nature and that an MS may have a different number of physical  
30 channels allocated to it in the downlink than in the uplink. For example, an Internet



connection may require more downlink bandwidth than uplink bandwidth. The data rate may also be different on the downlink and the uplink, e.g., an Internet connection may have only one channel with a high downlink data rate and a lower uplink data rate.

5 In the context of an exemplary W-CDMA system, a physical channel is identified by its code (i.e., channelization, scrambling, or a combination thereof) and frequency. In the downlink, the BS 100 transmits to the MS 110 using a certain power level associated with each of the physical channels. In the uplink, the MS 110 communicates with the BS 100 using a certain power level associated with each  
10 physical channel. Although not shown, the BS 100 is in communication with a Radio Network Controller (RNC) via a Mobile Switching Center (MSC), which in turn is connected to a Public Switched Telephone Network (PSTN).

In FIG. 3, an exemplary transceiver is shown. For the purposes of this description, the transceiver may be considered the MS 110. However, it will be  
15 appreciated that a BS may contain similar components. As shown in FIG. 3, the MS 110 includes a receiver 22 which operates in a conventional manner to filter, amplify and demodulate a signal from an antenna 20. A first decoder 24 is provided for selectively receiving and decoding a signal transmitted from the BS 100, e.g., on the DPCCCH. Likewise, signals on other channels assigned to the MS 110, e.g.,  
20 DPDCH1 and DPDCH2, are decoded at second and third decoders 26 and 27, respectively. The output data from these decoders is used by the processor 25 in a known manner to reconstruct and output the conveyed information, e.g., to provide the audio and video output of a wirelessly transmitted video conference. At the same time, information obtained during the decoding process can be used to  
25 determine the SIR of the signal received by the MS 110 and to perform other quality measurements, e.g., BER and FER calculations. For example, the SIR and quality measurement unit 28a can calculate the SIR of the signal received by the MS 110 as described in Equation (1) on page 2. The calculated SIR may be used by the uplink TPC decision unit 28b to determine which power control commands (i.e., "up" or  
30 "down") and power offset values to include in the messages to be sent on the uplink

for use by the BS 100 in its power control unit (not shown). The BER and/or FER measurements can be performed using any known technique in the downlink quality measurement unit 28c.

5 The measured BER and/or FER is supplied to the processor 25 from the downlink quality measurement unit 28c. The processor 25 uses the quality measurements to adjust the power offset values which are delivered to the power level controller 29.

10 The information to be transmitted on the uplink on the DPCCCH, DPDCH1 and DPDCH2, is further processed, e.g., modulated, and then transmitted. The power level at which the different physical channels are transmitted is controlled by the power level controller 29 and may vary between channels. The power level controller 29 controls the uplink transmit power based on the power offset values received from the BS 100 or calculated by the MS 110 and the downlink transmit power control (DLTPC) commands transmitted by the BS 100.

15 Having described an exemplary base station and an exemplary mobile station for communicating information over a plurality of physical channels onto which one or more radio bearers can be mapped, and making various signal strength and quality measurements, exemplary techniques for generating the power control commands and power offset values according to the present invention will now be described with respect to FIG. 4. In FIG. 4, an exemplary transmit processing chain  
20 is depicted in which each TFC is processed using a set of function units generally designated by the reference numeral 200. Each transmitter may contain a plurality of such processing chains 200, one for each traffic channel.

25 A cyclic redundancy check (CRC) field is attached to a data portion associated with a first TFC in a CRC attachment unit 210. Block concatenation and code block segmentation are performed in a concatenation/segmentation unit 220. Channel coding, e.g., convolutional coding, is performed in a channel coding unit 230, and radio frame equalization operations are carried out in a radio frame equalization unit 240. The output of the radio frame equalization unit 240 is  
30 subjected to a first interleaving process at a 1st interleaving unit 250 prior to being

divided into radio frames in a radio frame segmentation unit 260. The resulting radio frames undergo rate matching in a rate matching unit 270 which coordinates the transmission rates between TFCs.

The rate matching unit 270 punctures or repeats bits of data, depending on the number of bits to be transmitted on all the channels in a frame and the data rate of each channel. The amount of puncturing/repetition is proportional to a rate matching parameter (RM). The rate matching parameter RM is used to prioritize the channels and is signaled to the MS 110 from the BS 100.

The rate matched radio frames from each TFC are multiplexed together in a multiplexing unit 280 in preparation for transmission. The resulting data stream is segmented based on the physical channel into which it is to be transmitted in a segmentation unit 285, and a second interleaving process is performed in a 2nd interleaving unit 288 for each channel's data. The outputs of the 2nd interleaving units 288 are then mapped onto their respective physical channels, e.g., by spreading the output with designated spreading codes associated therewith in a physical mapping unit 290. The power levels of the transmitted physical channels are then adapted by weighting them with a gain factor in accordance with the power level offsets between the DPDCHs and the DPCCCH. When a new TFC (e.g., having a different data rate than a previous TFC) is to be transmitted, a new offset value is needed.

The gain factors for a control channel and a data channel,  $\beta_c$  and  $\beta_d$ , respectively, may be explicitly transmitted from the BS 100 to the MS 110, e.g., in the DPCCCH, for each TFC as specified in the above-referenced document, "Spreading and Modulation". When the gain factors  $\beta_c$  and  $\beta_d$  are transmitted for each TFC, the  $\beta$ -values can be applied to tailor the uplink transmit power in the MS 110 at the start of the first slot where a new TFC is used. For example, the output transmit power can be changed at the same time that the  $\beta$ -values are changed in accordance with the following equation:

$$P_{out,current} = \frac{1 + \frac{\beta_{d,current}^2}{\beta_{c,current}^2}}{1 + \frac{\beta_{d,previous}^2}{\beta_{c,previous}^2}} P_{out,previous} + TPC \quad (2)$$

where

$P_{out,previous}$  is the output power in the slot before the new TFC is used;

$\beta_{d,current}$  is the  $\beta_d$  value used for the new TFC;

$\beta_{c,current}$  is the  $\beta_c$  value used for the new TFC;

$\beta_{d,previous}$  is the  $\beta_d$  value used for the previous TFC;

$\beta_{c,previous}$  is the  $\beta_c$  value used for the previous TFC; and

$TPC$  is the change in transmit power resulting from the transmit

control command being transmitted according to the transmit power control procedure.

As an alternative to explicitly transmitting the gain factors values each time a TFC is changed, a mechanism can be provided by which the MS 110 and the BS 100 can calculate the power offset, e.g., based on the change in data rates used for the different TFCs. The power offset between the DPDCH and DPCCCH can be determined such that (1) the transmitted  $E_b$  (before coding) on the DPDCH remains constant, regardless of the data rate to be transmitted and (2) the transmit power used for the DPCCCH remains constant, except for the power control power step, such that the power control mechanisms are not affected.

According to an exemplary embodiment, the power offset between the channels may be adjusted according to the bit rate of the transport channels. This solution will work well when all of the TFCs have the same coding rate and rate matching parameters, but not as well when the TFCs have different coding rates. The total coding rate has to be taken into consideration. This coding rate  $R_{c, tot}$  includes the coding rate of the actual encoder,  $R_c$ , and the rate matching rate,  $R_{c \rightarrow rate}$ . The total coding rate,  $R_{c, tot}$ , may be given by  $R_{c, tot} = R_c * R_{c \rightarrow rate}$ . Therefore, in addition to changes in data rate, both the coding rate and rate matching parameters

should be taken into account when determining how to adjust the power offset. Moreover, determination of the offset should be based on information describing the data rate before the rate matching is performed. Otherwise, only the spreading factor is taken into account, because each frame to be transmitted on the uplink is filled up after the rate matching is performed in unit 270.

The exemplary rate matching algorithm employed in the rate matching unit 270 has the property that the channel bit rate, and thereby the power setting of each TFC, is proportional to the sum  $\sum_i RM_i \cdot N_i$ , where  $N_i$  is the number of bits delivered from the radio frame segmentation unit 260 for TFC 'i', as seen in FIG. 4, and  $RM_i$  is the signaled rate matching parameter for the TFC. When this information is used for the ratio of power between the DPDCH transmit power and the DPCCH transmit power, the code rate and the rate matching parameters for the different TFCs channels are taken into account, before rate matching is performed.

Taking the foregoing considerations into account, the power offset for each frame can be determined based on the following inequality:

$$\frac{\beta_{d,current}}{\beta_{c,current}} \geq \frac{\beta_{d,signaled}}{\beta_{c,signaled}} \cdot \sqrt{\frac{\left[ \sum_i RM_i \cdot N_i \right]_{current}}{\left[ \sum_i RM_i \cdot N_i \right]_{signaled}}} \quad (3)$$

where the index "signaled" indicates that the parameter is related to the TFC for which the  $\beta$ -values are signaled, and the index "current" indicates that the parameter is related to the TFC for which the  $\beta$ -values are to be calculated.

The current  $\beta$ -values should be quantized to the value that yields the next higher amplitude ratio. In the interest of simplicity, one of the  $\beta$ -values can always be set to 1.0, and the values are thus always well defined. If  $\beta_d$  is 1.0,  $\beta_c$  should be quantized downwards, and if  $\beta_c$  is 1.0, then  $\beta_d$  should be quantized to the next higher value. More specifically, this inequality can be used to calculate the approximate  $\beta$  parameters using the procedure shown in FIG. 5.

At step 500, the  $\text{Rate}_{\text{TFCj}}$  for all TFCs is calculated where the set of  $\beta$ -values are signaled. The parameter  $\text{Rate}_{\text{TFCj}}$  is defined for the TFC "j" as:

$$\text{Rate}_{\text{TFCj}} = \sum_i RM_i \cdot N_i \quad (4)$$

At step 510, the  $\text{Rate}_{\text{TFC}}$  for the TFC is calculated where the  $\beta$ -values are to be calculated. At step 520, the TFC which minimizes  $(\text{Rate}_{\text{TFCj}} - \text{Rate}_{\text{TFC}})$  is used as the base for the calculation of the  $\beta$ -set. At step 530, the approximate  $\beta$  parameters are calculated using the following equation:

$$\frac{\beta_{d,\text{current}}}{\beta_{c,\text{current}}} \geq \frac{\beta_{d,\text{signaled}}}{\beta_{c,\text{signaled}}} \cdot \sqrt{\frac{\left| \sum_i RM_i \cdot N_i \right|_{\text{current}}}{\left| \sum_i RM_i \cdot N_i \right|_{\text{signaled}}}} \quad (5)$$

$$\text{If } \frac{\beta_{d,\text{current}}}{\beta_{c,\text{current}}} > 1.0, \text{ then } \beta_{d,\text{current}} = 1.0 \text{ and } \beta_{c,\text{current}} = \text{quantized} \left[ \frac{\beta_{c,\text{current}}}{\beta_{d,\text{current}}} \right]$$

where "quantized" means quantized to a next higher value. In this case,  $\beta_{c,\text{current}}$  is the power offset.

$$\text{If } \frac{\beta_{d,\text{current}}}{\beta_{c,\text{current}}} < 1.0, \text{ then } \beta_{c,\text{current}} = 1.0 \text{ and } \beta_{d,\text{current}} = \text{quantized} \left[ \frac{\beta_{c,\text{current}}}{\beta_{d,\text{current}}} \right]$$

where "quantized" means quantized to a next lower value. In this case,  $\beta_{d,\text{current}}$  is the power offset.

The output power at the transmit antenna after the power offset is changed can be controlled such that the current frame of DPCCCH remains at the same power as the previous frame, except for any power change created by the inner loop power control procedure. Thus for the DPCCCH there will be a power step between the previous slot and the current slot, which is the first slot with the new rate matching.

The power offsets determined for each physical data channel can be used to transmit information on those channels at different power levels using any desired circuit configuration. An exemplary device for implementing these power offsets is illustrated in FIG. 6. In FIG. 6, each of DPDCH1, DPDCH2 and DPCCH are spread by their unique spreading codes  $C_{SPREAD,DPDCH1}$ ,  $C_{SPREAD,DPDCH2}$ ,  $C_{SPREAD,DPCCH}$  at mixers 600, 610 and 620, respectively. In FIG. 6,  $\beta_c$  is assumed to be 1. Thus, no weighting of the control channel DPCCH is needed. Prior to being summed with the other physical channels at an adder 660 and scrambled at a mixer 670, DPDCH1 is adjusted (amplified) by a variable gain amplifier 630. The gain of the amplifier 640 is set by the power control commands delivered from the power control unit 650 (e.g., the power level controller 29 of MS 110) as well as the gain factors according to Equation 1. The  $\beta$  values are calculated, e.g., in the power control unit 650, based on the received power control commands, the data rate and rate matching parameters of all the channels as well as the signalled offset parameters. The transmit power of DPDCH2 is offset from that of the DPCCH in a similar manner using the power control unit 640. Power control commands received from, e.g., the BS 100, are used at the amplifier 680 to adjust the output signal.

FIG. 7 illustrates a method for adjusting a transmit power according to exemplary embodiments. The method begins at step 700 at which a data rate of at least a first channel, e.g., a data channel, is determined. For simplicity of illustration, only one data channel is described. However, it will be appreciated that several data channels can be used. At step 710, a ratio of power between the first channel and the second channel, e.g., a control channel, is adjusted based on the determined data rate, e.g., a data transmission rate. The ratio may also be adjusted based on a coding rate and/or a rate matching parameter. The rate matching parameter may be calculated in the manner described in FIG. 5 or it may be received, e.g., from a base station. At step 720, the transmit power of the first channel is adjusted based on the adjusted ratio. Although steps 710 and 720 have been illustrated separately for ease of explanation, it will be appreciated that these steps may be performed at the same time, i.e., the power may be adjusted as the ratio

is adjusted. At step 730, the transmit power of the first and second channels is adjusted based on power control commands.

According to exemplary embodiments, a technique is provided for handling a power offset between channels such as data channels and control channels. The technique ensures that signals are transmitted with sufficient output power while minimizing interference between signals.

According to exemplary embodiments of the present invention, by setting the power offset between the DPDCH and the DPCCH to be proportional to the number of bits output from a radio frame segmentation unit and to rate matching parameters used in a rate matching unit, the power offset will be proportional to the rate of the transport channel. When the data rate of a DPDCH changes, the output power and the amplitude ratio between the DPDCH and DPCCH are changed in a manner which can be determined by a terminal, e.g., a mobile station. In this way, both the power control loop and the manner in which the DPCCH is detected are unaffected because the power of the DPCCH is not changed due to a changed TFC. At the same time, the data transmitted on the DPDCH is transmitted using the same bit energy, which implies that performance, e.g., received signal quality, on the DPDCH is, in general, unaffected.

Although in the exemplary embodiments described above, a user is allocated a DPCCH which can be used as a reference channel with respect to which power offset commands can be generated for associated DPDCHs, those skilled in the art will appreciate that some systems may not utilize DPCCHs in this manner. If a DPCCH is not allocated to a user, then any other channel, e.g., one of the DPDCHs, can be used as the reference channel.

It will be understood that Applicants' invention is not limited to the particular embodiments described above and that modifications may be made by persons skilled in the art. For example, a reference TFC can be used which includes a flag that is transmitted which can be used as a base for determining how to set the power offset. The scope of Applicants' invention is determined by the following



claims, and any and all modifications that fall within that scope are intended to be included therein.

**WHAT IS CLAIMED IS:**

1. A method for controlling transmit power, comprising the steps of:  
determining a data rate of at least a first channel; and  
5 controlling the transmit power of the at least first channel based on the  
determined data rate.
2. The method of claim 1, further comprising a step of adjusting a ratio  
of power between the at least first channel and a second channel based on the data  
10 rate of the first data channel, wherein the transmit power of the at least first channel  
is controlled using the adjusted ratio.
3. The method of claim 2, wherein the first data channel is a data  
channel, and the second data channel is a control channel.
- 15 4. The method of claim 2, wherein the ratio is adjusted such that a  
power offset between the first channel and the second channel is proportional to the  
data rate of the first channel.
- 20 5. The method of claim 2, wherein the ratio is adjusted based on the  
coding rate.
6. The method of claim 2, wherein the ratio is adjusted based on the  
data transmission rate.
- 25 7. The method of claim 2, wherein the ratio is adjusted based on a rate  
matching parameter.
8. The method of claim 1, further comprising receiving power control  
30 commands and adjusting the transmit power based on the received power control

commands.

9. An apparatus for controlling transmit power, comprising:  
means for determining a data rate of at least a first channel; and  
5 means for controlling the transmit power of the at least first channel  
based on the determined data rate.

10. The apparatus of claim 9, further comprising means for adjusting a  
ratio of power between the at least first channels and second channels based on the  
10 data rate of the at least first channel, wherein the means for controlling the transmit  
power uses the adjusted ratio.

11. The apparatus of claim 10, wherein the first data channel is a data  
channel, and the second data channel is a control channel.

12. The apparatus of claim 10, wherein the ratio is adjusted such that  
power offset is proportional to the data rate of the first channel.

13. The apparatus of claim 10, wherein the ratio is adjusted based on the  
20 coding rate.

14. The apparatus of claim 10, wherein the ratio is adjusted based on the  
data transmission rate.

- 25 15. The apparatus of claim 10, wherein the ratio is adjusted based on a  
rate matching parameter.

16. The apparatus of claim 10, further comprising means for adjusting the  
30 power of the first and second channels based on power control commands.

**ABSTRACT**

Transmit power control is achieved by determining a data rate of at least a first channel and controlling the transmit power of the at least first channel based on the determined data rate. The transmit power may be adjusted based on a ratio of power between the at least first channel and a second channel, and the ratio may be adjusted based on the data rate of the first data channel. The first data channel may be a data channel, and the second data channel may be a control channel. The ratio is adjusted such that a power offset between the first channel and the second channel is proportional to the data rate of the first channel. The ratio may be adjusted based on the coding rate, data transmission rate, and/or a rate matching parameter. The transmit power may also be adjusted based on received power control commands. The transmit power may be adjusted in this manner in the uplink or the downlink direction.

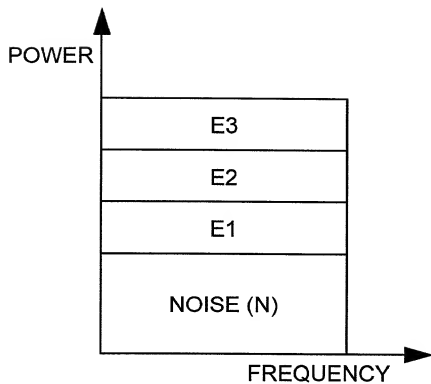
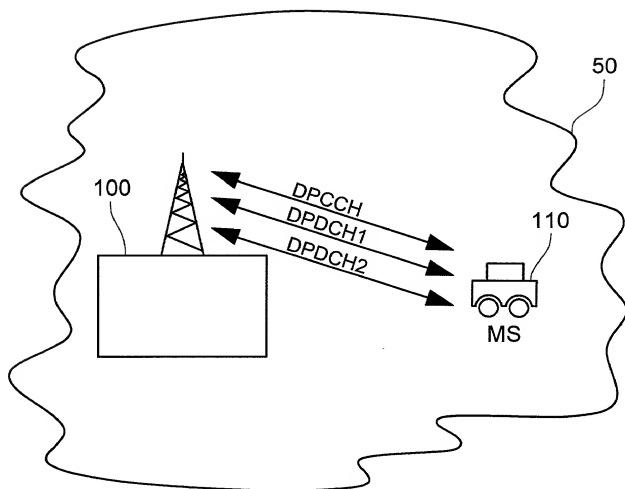


FIG. 1

**FIG. 2**

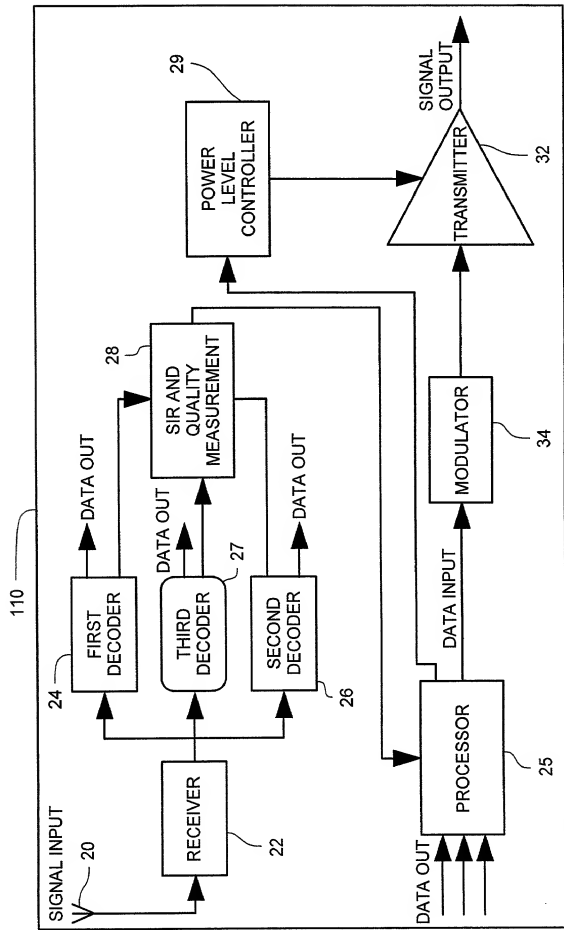


FIG. 3

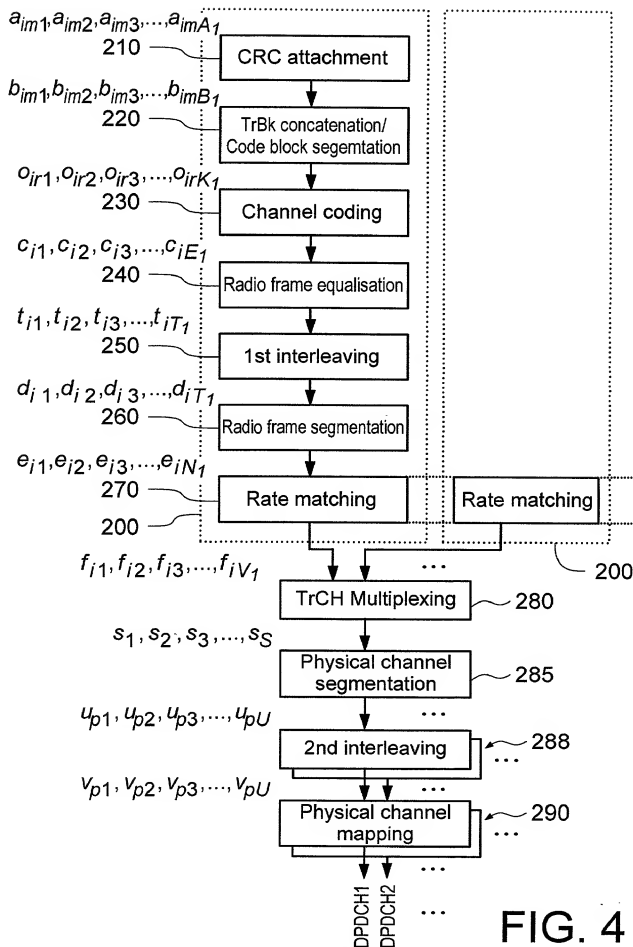


FIG. 4



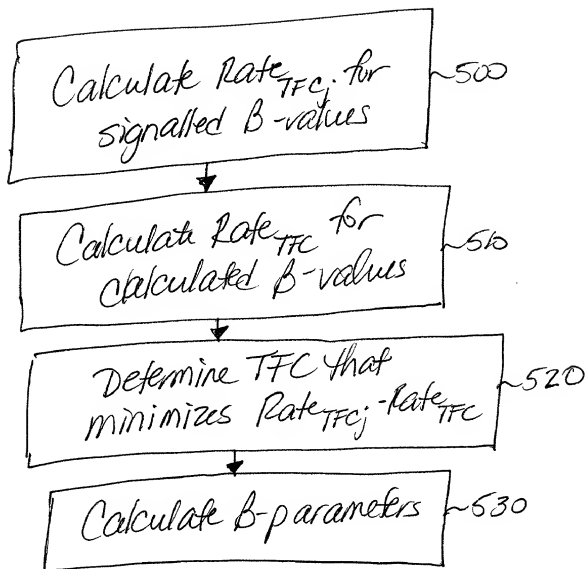


FIG. 5

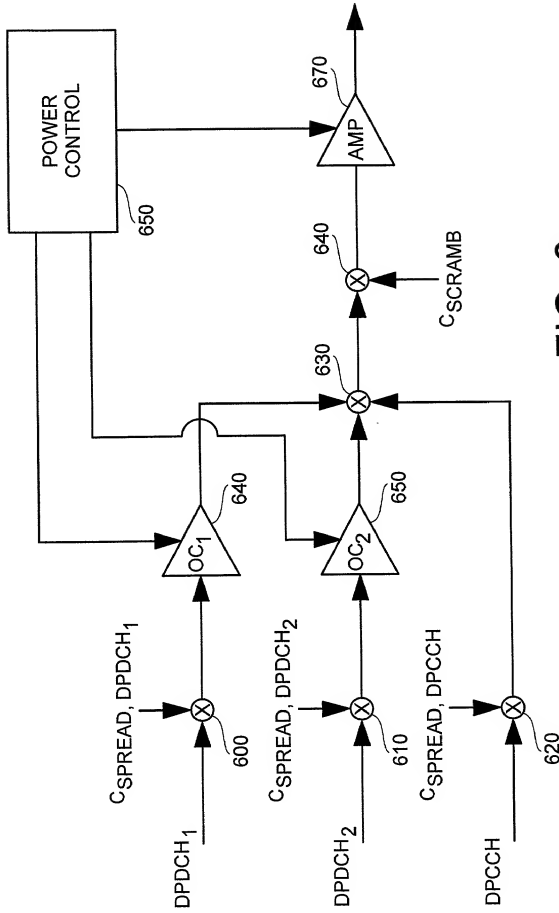


FIG. 6

```
graph TD; 700[DETERMINE DATA RATE] --> 710[ADJUST POWER RATIO  
BASED ON DETERMINED  
DATA RATE]; 710 --> 720[ADJUST POWER  
BASED ON RATIO]; 720 --> 730[ADJUST POWER  
BASED ON POWER  
CONTROL COMMANDS];
```

700 DETERMINE DATA RATE

710 ADJUST POWER RATIO  
BASED ON DETERMINED  
DATA RATE

720 ADJUST POWER  
BASED ON RATIO

730 ADJUST POWER  
BASED ON POWER  
CONTROL COMMANDS

FIG. 7

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**  
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NUMBER

040070-619

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;  
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method and Apparatus for Transmit Power Control

the specification of which (check only one item below):

☒ is attached hereto.

☐ was filed as United States application

Number \_\_\_\_\_

on \_\_\_\_\_

and was amended

on \_\_\_\_\_ (if applicable).

☐ was filed as PCT international application

Number \_\_\_\_\_

on \_\_\_\_\_

and was amended under PCT Article 19 and/or PCT Article 34

on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119 (a)-(e) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119:**

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. § 119
			__ Yes __ No
			__ Yes __ No
			__ Yes __ No
			__ Yes __ No
			__ Yes __ No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

60/156,699

(Application Number)

9/30/99

(Filing Date)

(Application Number)

(Filing Date)

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED)**  
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NO.  
**040070-619**

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations § 1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120:**

U.S. APPLICATIONS			STATUS (check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED	
<b>PCT APPLICATIONS DESIGNATING THE U.S.</b>					
PCT APPLICATION NO.	PCT FILING DATE	U.S. APPLICATION NUMBERS ASSIGNED (if any)			

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	Eric H. Weisblatt	30,505	Bruce T. Wieder	33,815
Robert S. Swecker	19,885	James W. Peterson	26,057	Todd R. Walters	34,040
Platon N. Mandros	22,124	Teresa Stanek Rea	30,427	Ronni S. Jilions	31,979
Benton S. Duffett, Jr.	22,030	Robert E. Krebs	25,885	Harold R. Brown III	36,341
Norman H. Steppio	22,716	William C. Rowland	30,888	Allen R. Baum	36,086
Ronald L. Grudziecki	24,970	T. Gene Dillabaunty	25,423	Steven M. duBois	35,023
Frederick G. Michaud, Jr.	26,003	Patrick C. Keane	32,858	Brian P. O'Shaughnessy	32,747
Alan E. Kopecki	25,813	Bruce J. Boggs, Jr.	32,344	Kenneth B. Leffler	36,075
Regis E. Sluter	26,999	William H. Benz	25,952	Fred W. Hattaway	32,236
Samuel C. Miller, III	27,360	Peter K. Skiff	31,917		
George A. Hovance, Jr.	28,531	Richard J. McGrath	29,195		
Robert G. Mukai	28,223	Matthew L. Schneider	32,814		
James A. LaBarre	28,632	Michael G. Savage	32,596		
E. Joseph Gess	28,510	Gerald F. Swiss	30,113		
R. Danny Huntington	27,903	Charles F. Wieland III	33,096		



**21839**

and: Stephen J. Tytran, Reg. No. 45,846 ; Jed W. Caven, Reg. No. 40,551

Address all correspondence to:



**21839**

**Ronald L. Grudziecki**  
**BURNS, DOANE, SWECKER & MATHIS, L.L.P.**  
P.O. Box 1404  
Alexandria, Virginia 22313-1404

Address all telephone calls to: Stephen J. Tytran and Michael G. Savage at (919) 941-9240.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED)**  
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NO.  
**040070-619**

FULL NAME OF SOLE OR FIRST INVENTOR Torgny PALENIUS		SIGNATURE		DATE	
RESIDENCE Löddeköpinge, Sweden		CITIZENSHIP SWEDISH			
POST OFFICE ADDRESS Svalörtsvägen 10, 246 050 Löddeköpinge, Sweden					
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF THIRD JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF EIGHTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					
FULL NAME OF NINTH JOINT INVENTOR, IF ANY		SIGNATURE		DATE	
RESIDENCE		CITIZENSHIP			
POST OFFICE ADDRESS					